

**UNCLASSIFIED**

---

**AD 296 411**

*Reproduced  
by the*

**ARMED SERVICES TECHNICAL INFORMATION AGENCY  
ARLINGTON HALL STATION  
ARLINGTON 12, VIRGINIA**



---

**UNCLASSIFIED**

NOTICE: When government or other drawings, specifications or other data are used for any purpose other than in connection with a definitely related government procurement operation, the U. S. Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

29 6411

CATALOGED BY ASTIA  
AS AD NO. \_\_\_\_\_

296 411

SCIENTIFIC REPORT NO. 2

"EXAMPLES OF P. D. F.'S OF SUMS AND PRODUCTS"

by

SZE-HOU CHANG and LIH-JYH WENG



Under joint support of

Contract No. AF19(604)7494 and Grant No. AF-AFOSR 62-371

SEPTEMBER 1962

NORTHEASTERN UNIVERSITY

360 HUNTINGTON AVENUE

BOSTON 15, MASSACHUSETTS

Project No. 4610

Task No. 461003

Prepared  
for

ELECTRONICS RESEARCH DIRECTORATE  
AIR FORCE CAMBRIDGE RESEARCH LABORATORIES  
OFFICE OF AEROSPACE RESEARCH  
UNITED STATES AIR FORCE  
BEDFORD, MASS.

**AFCRL 62-795**

**SCIENTIFIC REPORT NO. 2**

**"EXAMPLES OF P. D. F.'S OF SUMS AND PRODUCTS"**

by

**SZE-HOU CHANG and LIH-JYH WENG**

Under joint support of

**Contract No. AF19(604)7494 and Grant No. AF-AFOSR 62-371**

**SEPTEMBER 1962**

**NORTHEASTERN UNIVERSITY**

**360 HUNTINGTON AVENUE**

**BOSTON 15, MASSACHUSETTS**

**Project No. 4610**

**Task No. 461003**

Prepared

for

**ELECTRONICS RESEARCH DIRECTORATE**

**AIR FORCE CAMBRIDGE RESEARCH LABORATORIES**

**OFFICE OF AEROSPACE RESEARCH**

**UNITED STATES AIR FORCE**

**BEDFORD, MASS.**

"Requests for additional copies by Agencies of the Department of Defense, their contractors, and other Government Agencies should be directed to the:

ARMED SERVICES TECHNICAL INFORMATION AGENCY  
ARLINGTON HALL STATION  
ARLINGTON 12, VIRGINIA

Department of Defense contractors must be established for ASTIA services or have their 'need-to-know' certified by the cognizant military agency of their project or contract."

"All other persons and organizations should apply to the:


U. S. DEPARTMENT OF COMMERCE  
OFFICE OF TECHNICAL SERVICES  
WASHINGTON 25, D. C."

# EXAMPLES OF P.D.F.'s OF SUMS AND PRODUCTS

## Summary


In this note the calculations of the probability density functions (p.d.f.'s) of the sums and products of random variables are demonstrated. The random variables are selected pair-wise from four variables whose probability density functions are shown below:

### (a) Triangular




$$p(x) = \begin{cases} 0 & x < -1 \\ 1+x & -1 < x < 0 \\ 1-x & 0 < x < 1 \\ 0 & x > 1 \end{cases}$$

### (b) Gaussian




$$p(x) = \frac{1}{\sqrt{2\pi}} e^{-\frac{x^2}{2}}$$

### (c) Rectangular



$$p(x) = \begin{cases} 0 & x < -1 \\ \frac{1}{2} & -1 < x < 1 \\ 0 & x > 1 \end{cases}$$

### (d) Sinusoidal



$$p(x) = \begin{cases} 0 & x < -1 \\ \frac{1}{\pi} \frac{1}{\sqrt{1-x^2}} & -1 < x < 1 \\ 0 & x > 1 \end{cases}$$

There are altogether 10 different pairs for the sums and the same number of pairs for the products. They are listed according to the following scheme:

	a	b	c	d
a	1	5	6	7
b		2	8	9
c			3	10
d				4

It is evident that the blank spaces represent pairs which are merely repetitions of the 10 basic pairs.

In sections I and II the p.d.f.'s are calculated respectively for the sums and products of the pairs of variables which are considered statistically independent. Then in section III, pair 2 (i.e., the gaussian-gaussian combination) is treated for the case when the two gaussian variables are dependent, as expressed by their covariance matrix. In section IV, pair 4 is treated for the case when the two sinusoidal variables are dependent.


With the exception of one case, all results are expressed in terms of tabulated functions. The formulae, the tables and the graphs of the p.d.f.'s are given for all these cases.

#### I. SUM OF TWO INDEPENDENT VARIABLES

Let  $x$  and  $y$  be two independent random variables and  $s$  be their sum. The p.d.f.'s of  $x$ ,  $y$ , and  $s$  are represented by  $p_1(x)$ ,  $p_2(y)$  and  $p(s)$  respectively. The joint p.d.f. of  $x$  and  $y$  is given by

$$w_2(x, y) = p_1(x) p_2(y) \quad . \quad (I-1)$$

It is evident from the figure that:

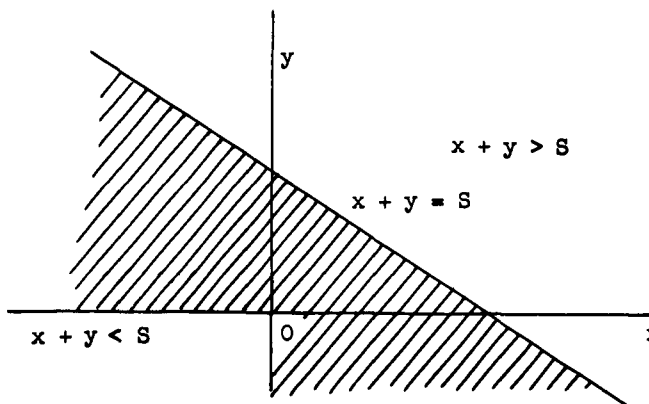

$$\begin{aligned} \int_{-\infty}^S p(s) ds &= \int_{-\infty}^{\infty} \int_{-\infty}^{S-x} w_2(x, y) dy dx \\ &= \int_{-\infty}^{\infty} \int_{-\infty}^{S-x} p_1(x) p_2(y) dy dx \quad . \end{aligned} \quad (I-2)$$

Differentiating both sides with respect to S:

$$p(S) = \int_{-\infty}^{\infty} w_2(x, S-x) dx \quad (I-3a)$$

$$= \int_{-\infty}^{\infty} p_1(x) p_2(S-x) dx \quad . \quad (I-3b)$$

Equation (I-3a) applies to the general case when  $x$  and  $y$  may or may not be dependent while equation (I-3b) applies only to the case where  $x$  and  $y$  are independent. The integral operation in (I-3b) is called the convolution of  $p_1(x)$  and  $p_2(y)$ .

Using either (I-3a) or (I-3b), the 10 cases for the sums cited in the summary have been evaluated and the results of the evaluation are listed on the next page. Since the p.d.f.'s are all even functions of  $s$ , only the values for  $s > 0$  are considered.



No.	Sum of	$\frac{p(s)}{}$	
1.	a + a	$\frac{1}{6} [3s^3 - 6s^2 + 4]$	$0 < s < 1$
		$\frac{1}{6} [-s^3 + 6s^2 - 12s + 8]$	$1 < s < 2$
		0	$s > 2$
2.	b + b	$\frac{1}{2\sqrt{\pi}} e^{-\frac{s^2}{4}}$	
3.	c + c	$\frac{1}{4} (2-s)$	$0 < s < 2$
		0	$s > 2$
4.	d + d	$\frac{1}{\pi^2} K \left( \sqrt{(1 - \frac{s}{2})(1 + \frac{s}{2})} \right)$	$0 < s < 2$
		where K is the complete elliptic integral of the first kind.	
		0	$s > 2$
5.	a + b	$(s+1) \phi^{-1}(s+1) - 2s \phi^{-1}(s) + (s-1) \phi^{-1}(s-1)$	
		$+ \frac{\sqrt{2}}{\sqrt{\pi}} \left[ e^{-\frac{s^2}{2}} \left( e^{-\frac{1}{2}} \cosh s - 1 \right) \right]$ ,	$0 < s < 2$
		where $\phi^{-1}$ is the error integral.	
6.	a + c	0	$s > 2$
		$\frac{1}{4} (2-s^2)$	$0 < s < 1$
		$\frac{1}{4} (s^2 - 4s + 4)$	$1 < s < 2$
7.	a + d	0	$s > 2$
		$\frac{1}{\pi} \left\{ (s+1) \cos^{-1} s + (1-s) \left[ \sin^{-1} s + \sin^{-1} (1-s) \right] \right.$	$0 < s < 1$
		$\left. + \sqrt{2s-s^2} - 2\sqrt{1-s^2} \right\}$	
		$\frac{1}{\pi} \left\{ (1-s) \cos^{-1} (s-1) + \sqrt{2s-s^2} \right\}$	$1 < s < 2$

No.	Sum of	$p(s)$	
8.	$b + c$	$\frac{1}{2} \left[ \phi^{-1}(s+1) - \phi^{-1}(s-1) \right]$	
9.	$b + d$	$\frac{1}{\sqrt{2} \pi^{\frac{3}{2}}} \int_{s-1}^{s+1} e^{-\frac{x^2}{2}} \frac{1}{\sqrt{1-(s-x)^2}} dx$	
10.	$c + d$	$\begin{cases} \frac{1}{2\pi} \cos^{-1}(s-1) & 0 < s < 2 \\ 0 & s > 2 \end{cases}$	

The graphs of these p.d.f.'s are shown as Figs. 1-10. With the exception of case 9, all graphs were obtained from tabulated functions. Case 9 was obtained by direct computation\* using IBM Computer 1620.

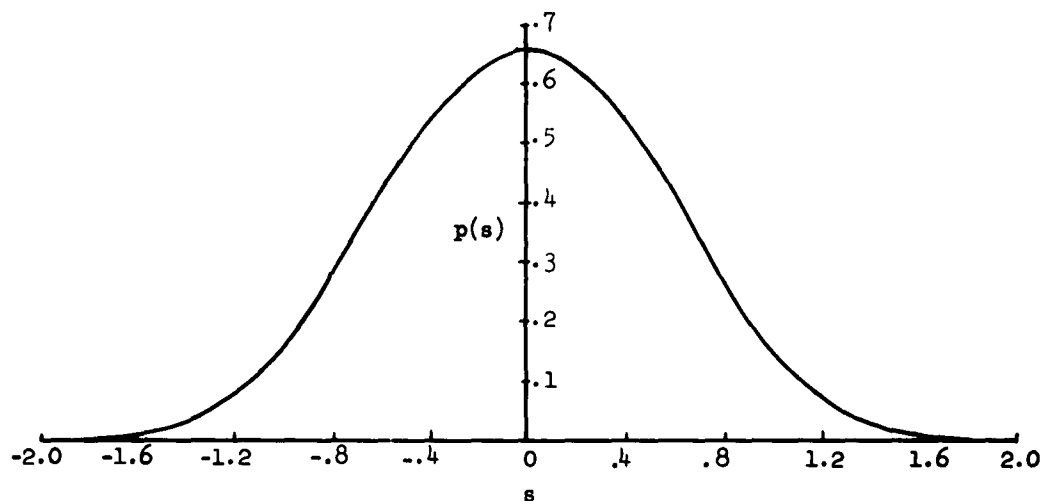


Fig. 1. P.D.F. of  $s = x + y$ ,  $x$  and  $y$  independent,  
 $x$  = triangular variate,  $y$  = triangular variate.

---

\*W.H. Lob helped in programing this computation.

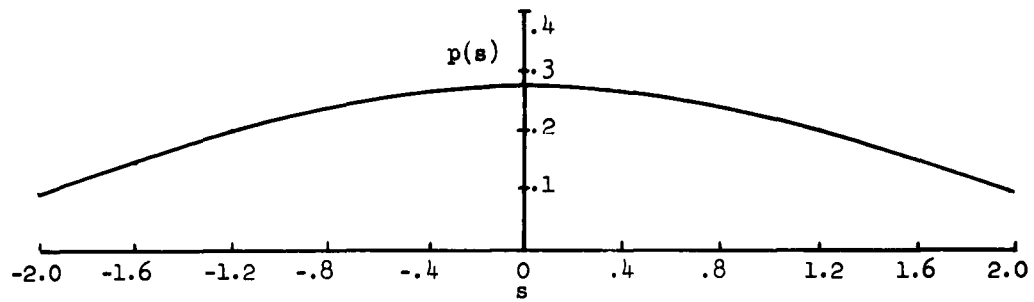


Fig. 2. P.D.F. of  $s = x + y$ ,  $x$  and  $y$  independent,  
 $x$  = gaussian variate,  $y$  = gaussian variate.

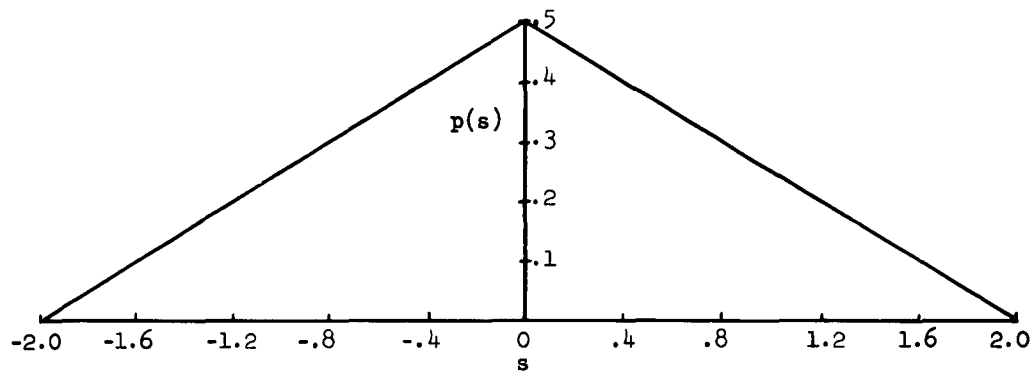


Fig. 3. P.D.F. of  $s = x + y$ ,  $x$  and  $y$  independent,  
 $x$  = rectangular variate,  $y$  = rectangular variate.

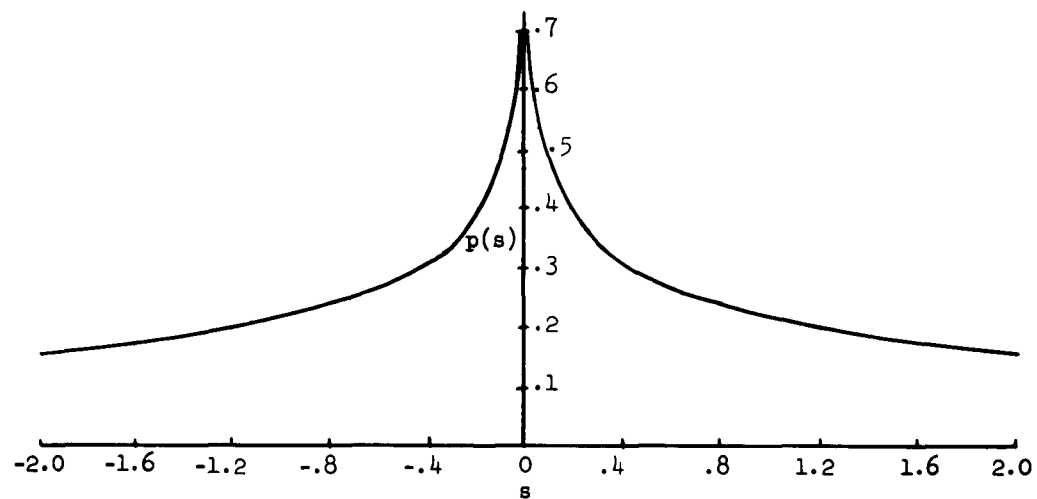


Fig. 4. P.D.F. of  $s = x + y$ ,  $x$  and  $y$  independent,  
 $x$  = sinusoidal variate,  $y$  = sinusoidal variate.

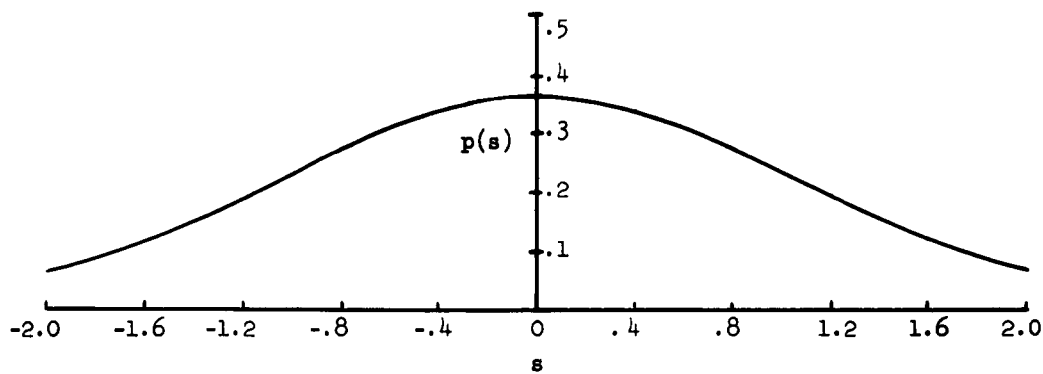


Fig. 5. P.D.F. of  $s = x + y$ ,  $x$  and  $y$  independent,  
 $x$  = triangular variate,  $y$  = gaussian variate.

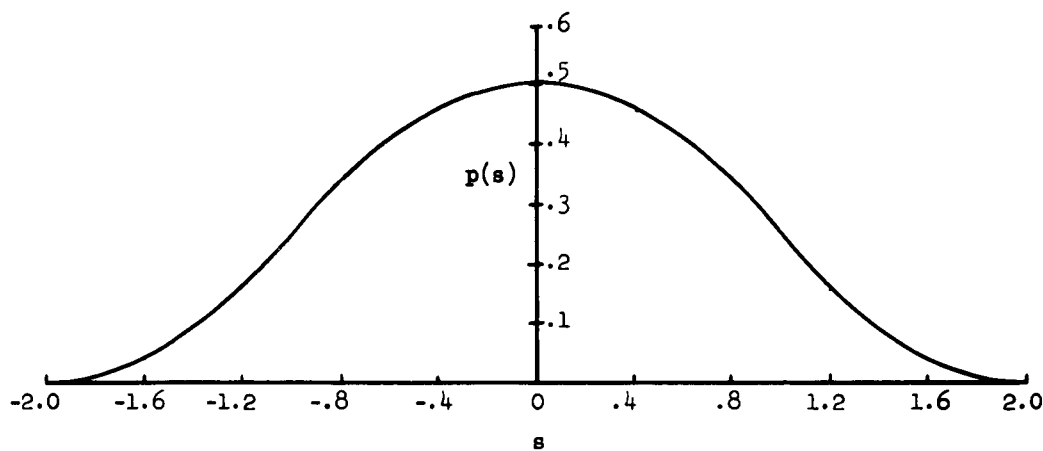


Fig. 6. P.D.F. of  $s = x + y$ ,  $x$  and  $y$  independent,  
 $x$  = triangular variate,  $y$  = rectangular variate.

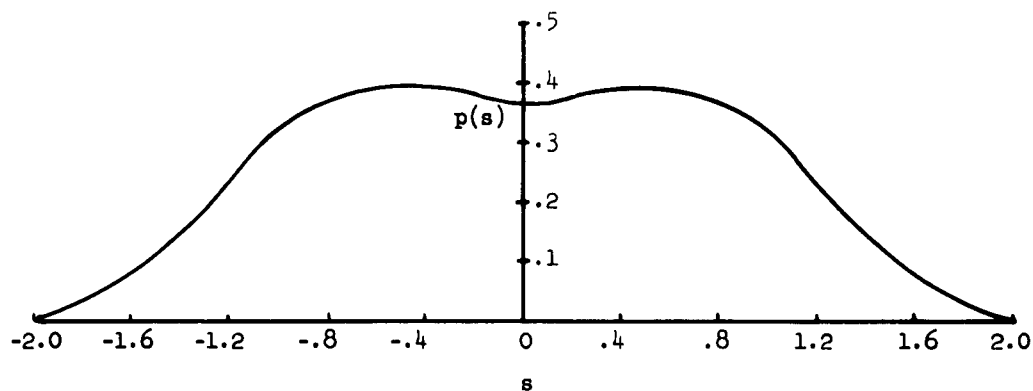


Fig. 7. P.D.F. of  $s = x + y$ ,  $x$  and  $y$  independent,  
 $x$  = triangular variate,  $y$  = sinusoidal variate.

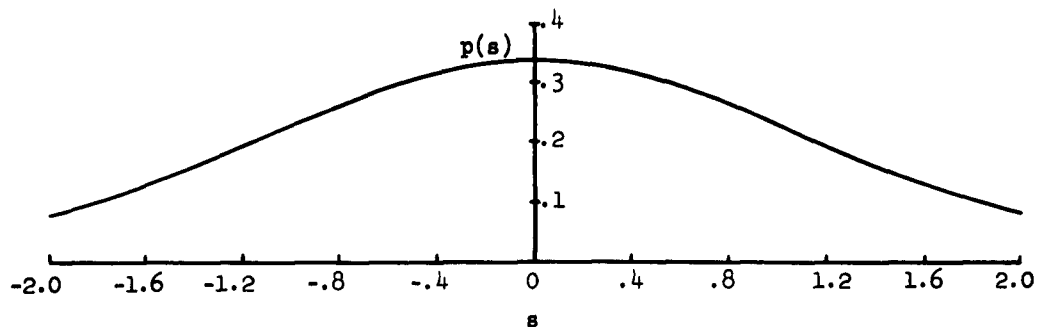


Fig. 8. P.D.F. of  $s = x + y$ ,  $x$  and  $y$  independent,  
 $x$  = gaussian variate,  $y$  = rectangular variate.

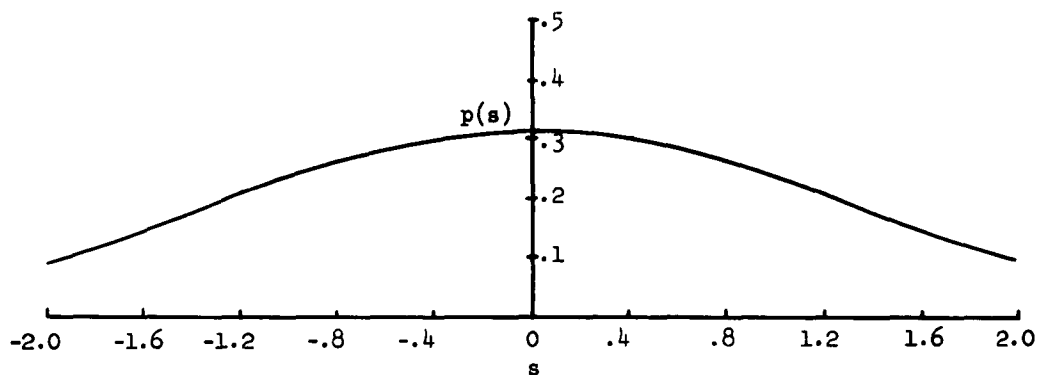


Fig. 9. P.D.F. of  $s = x + y$ ,  $x$  and  $y$  independent,  
 $x$  = gaussian variate,  $y$  = sinusoidal variate.

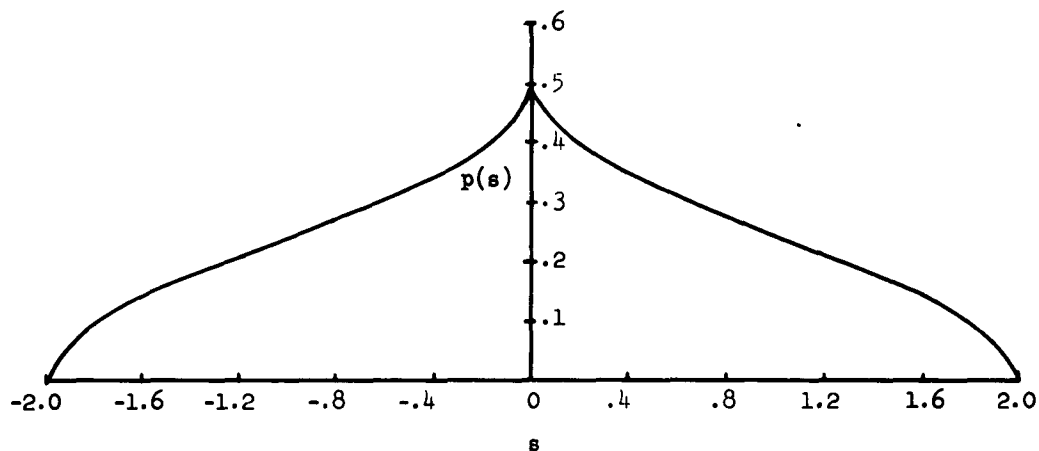



Fig. 10. P.D.F. of  $s = x + y$ ,  $x$  and  $y$  independent,  
 $x$  = rectangular variate,  $y$  = sinusoidal variate.

## II. PRODUCT OF TWO INDEPENDENT VARIABLES

Let  $x$  and  $y$  be two independent random variables and  $z$  be their product. The p.d.f. of  $x$ ,  $y$  and  $z$  are represented by  $p_1(x)$ ,  $p_2(y)$  and  $p(z)$  respectively. The joint p.d.f. of  $x$  and  $y$  is given by

$$W_2(x, y) = p_1(x) p_2(y) \quad . \quad (\text{II-1})$$

It is evident from the figure that for  $Z > 0$

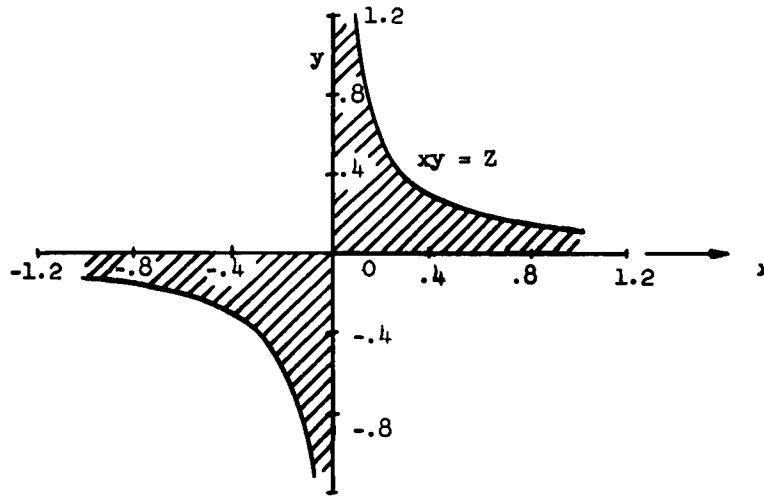

$$\begin{aligned} \int_0^Z p(z) dz &= 2 \int_0^\infty \int_0^{\frac{Z}{x}} W_2(x, y) dy dx \\ &= 2 \int_0^\infty \int_0^{\frac{Z}{x}} p_1(x) p_2(y) dy dx \quad . \end{aligned} \quad (\text{II-2})$$

Differentiating both sides with respect to  $Z$ ,

$$p(Z) = 2 \int_0^\infty W_2(x, \frac{Z}{x}) \frac{1}{x} dx \quad (\text{II-3a})$$

$$= 2 \int_0^\infty p_1(x) p_2\left(\frac{Z}{x}\right) \frac{1}{x} dx \quad . \quad (\text{II-3b})$$

Equations (II-3b) applies only to the case where  $x$  and  $y$  are independent while (II-3a) is not so restricted.

Using either (II-3a) or (II-3b), the 10 cases for the products cited in the summary have been evaluated and the results of the evaluation are listed below. Again, since the p.d.f.'s are even functions of  $z$ , only positive values of  $z$  are considered.

No.	Product of	$\frac{p(z)}{}$	
1.	$a \times a$	$\begin{cases} 2 \left[ (1+z) \ln \frac{1}{z} - 2(1-z) \right] \\ 0 \end{cases}$	$\begin{matrix} 0 < z < 1 \\ z > 1 \end{matrix}$
2.	$b \times b$	$\begin{cases} \frac{1}{2} i H_0^{(1)}(iz) \\ \text{where } H_0^{(1)} \text{ is the Hankel's function} \\ \text{of zero order.} \end{cases}$	
3.	$c \times c$	$\begin{cases} \frac{1}{2} \ln \frac{1}{z} \\ 0 \end{cases}$	$\begin{matrix} 0 < z < 1 \\ z > 1 \end{matrix}$
4.	$d \times d$	$\begin{cases} \frac{1}{\pi^2} K(1-z^2) \\ \text{where } K \text{ is the complete elliptic integral} \\ \text{of the first kind.} \\ 0 \end{cases}$	$\begin{matrix} 0 < z < 1 \\ z > 1 \end{matrix}$
5.	$a \times b$	$\begin{cases} \frac{1}{\sqrt{2\pi}} Ei \left( \frac{z^2}{2} \right) - 2\phi^0(z) + 2z \left[ \frac{1}{2} - \phi^{-1}(z) \right] \\ \text{where } Ei \text{ is the exponential integral, } \phi^0 \text{ the} \\ \text{gaussian p.d.f., and } \phi^{-1} \text{ is the error integral.} \end{cases}$	
6.	$a \times c$	$\begin{cases} \ln \frac{1}{z} - (1-z) \\ 0 \end{cases}$	$\begin{matrix} 0 < z < 1 \\ z > 1 \end{matrix}$
7.	$a \times d$	$\begin{cases} \frac{2}{\pi} \left[ \ln \left( \frac{1 + \sqrt{1-z^2}}{z} \right) - \sqrt{1-z^2} \right] \\ 0 \end{cases}$	$\begin{matrix} 0 < z < 1 \\ z > 1 \end{matrix}$
8.	$b \times c$	$-\frac{1}{2\sqrt{2\pi}} Ei \left( -\frac{z^2}{2} \right)$	

No.	Product of	$p(z)$	
9.	$b \times d$	$\begin{cases} \frac{1}{2} \phi^0\left(\frac{z}{\sqrt{2}}\right) \left[1 H_0^{(1)}\left(1 \frac{z^2}{4}\right)\right] \\ \text{where } H_0^{(1)} \text{ is the Hankel's function of} \\ \text{zero order.} \end{cases}$	
10.	$c \times d$	$\begin{cases} \frac{1}{\pi} \ln \left[ \frac{1 + \sqrt{1-z^2}}{z} \right] \\ 0 \end{cases}$	$0 < z < 1$ $z > 1$

The graphs of these 10 p.d.f.'s are shown as Figs. 11-20.

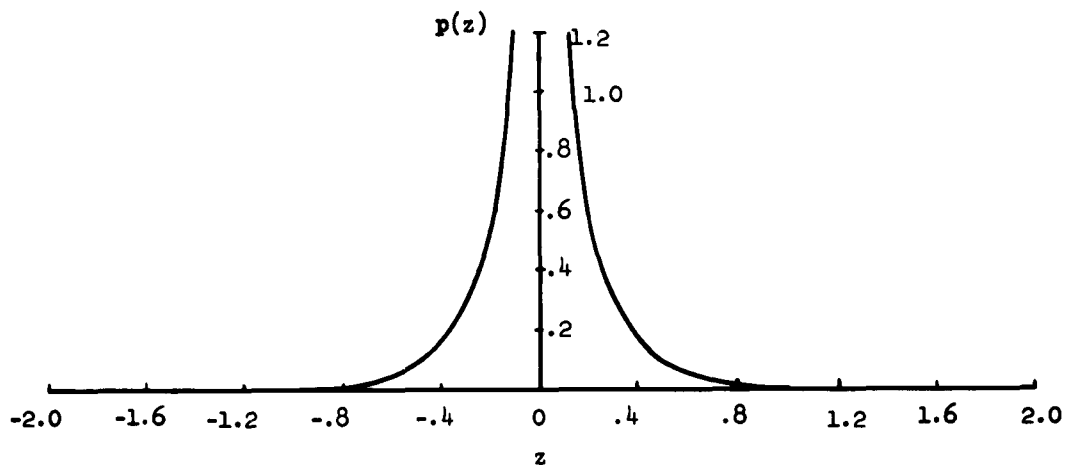


Fig. 11. P.D.F. of  $z = xy$ ,  $x$  and  $y$  independent,  
 $x = \text{triangular variate}$ ,  $y = \text{triangular variate}$ .

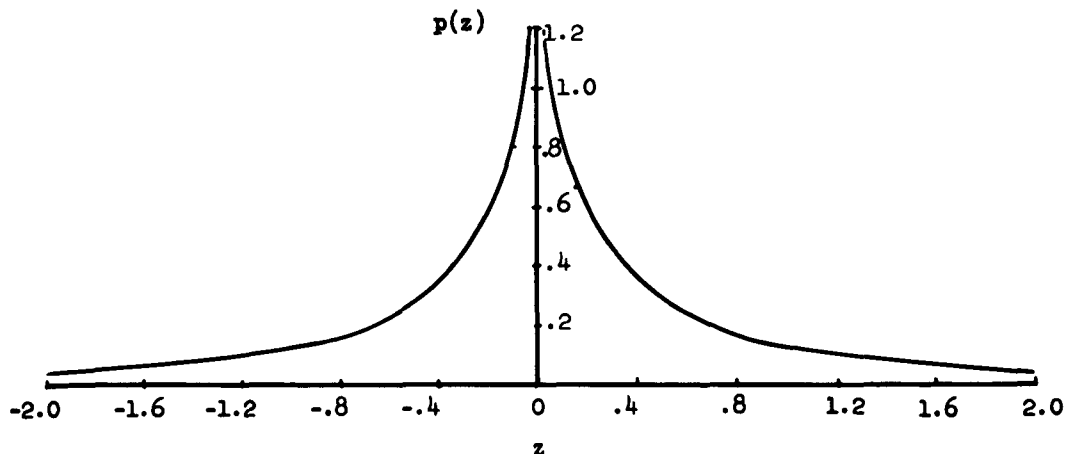


Fig. 12. P.D.F. of  $z = xy$ ,  $x$  and  $y$  independent,  
 $x = \text{gaussian variate}$ ,  $y = \text{gaussian variate}$ .



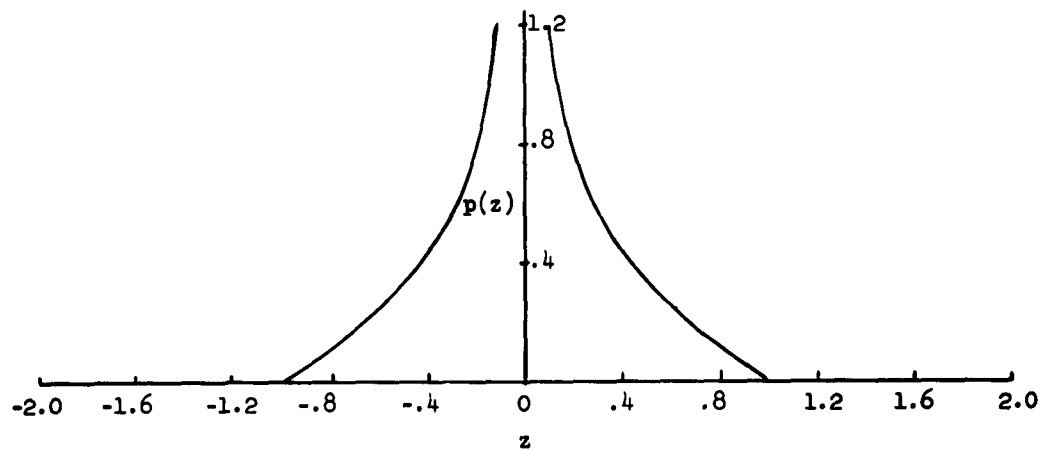


Fig. 13. P.D.F. of  $z = xy$ ,  $x$  and  $y$  independent,  
 $x$  = rectangular variate,  $y$  = rectangular variate.

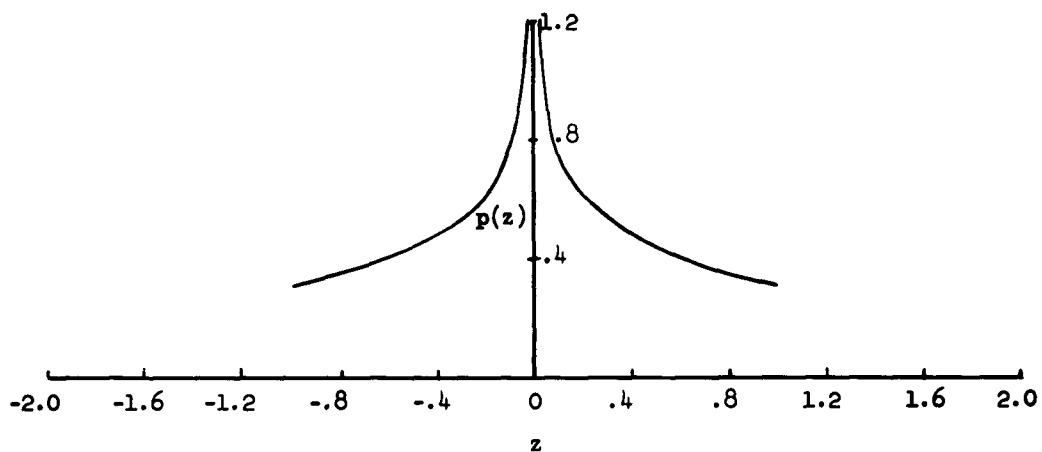


Fig. 14. P.D.F. of  $z = xy$ ,  $x$  and  $y$  independent,  
 $x$  = sinusoidal variate,  $y$  = sinusoidal variate.

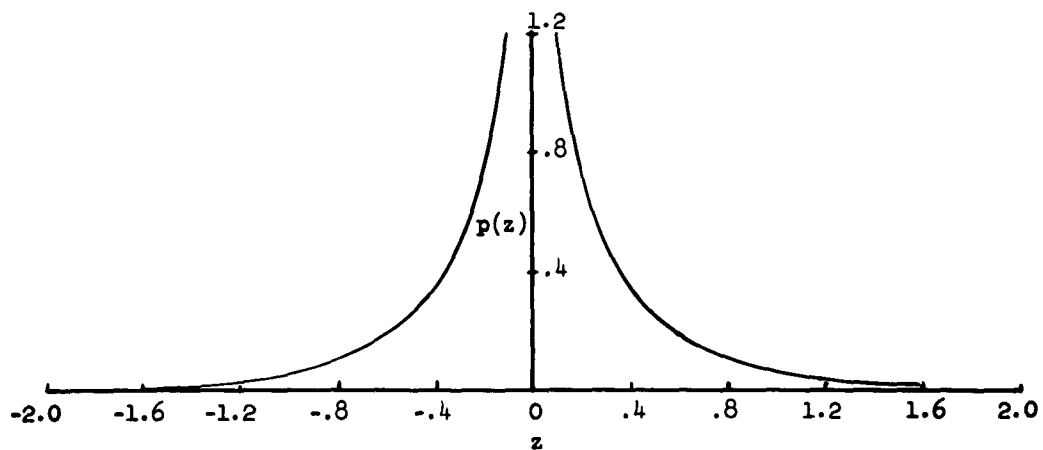


Fig. 15. P.D.F. of  $z = xy$ ,  $x$  and  $y$  independent,  
 $x$  = triangular variate,  $y$  = gaussian variate.

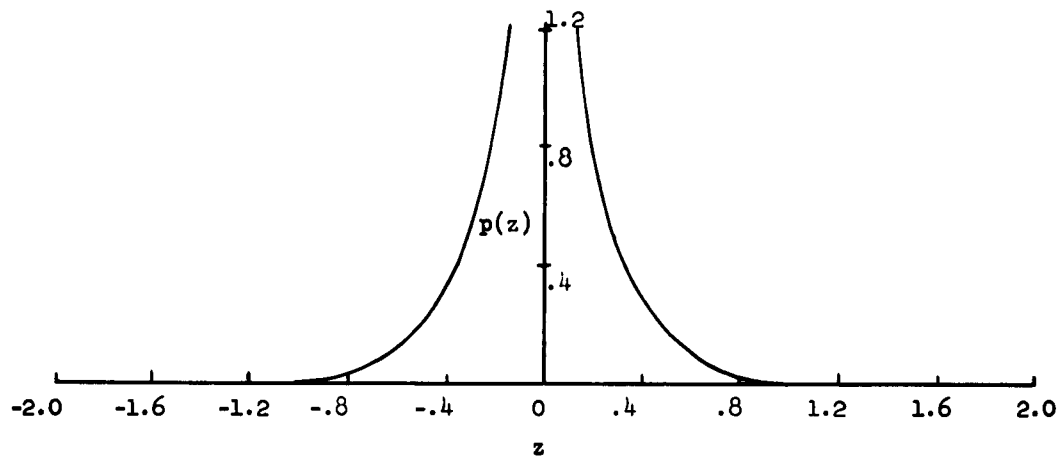


Fig. 16. P.D.F. of  $z = xy$ ,  $x$  and  $y$  independent,  
 $x$  = triangular variate,  $y$  = rectangular variate.

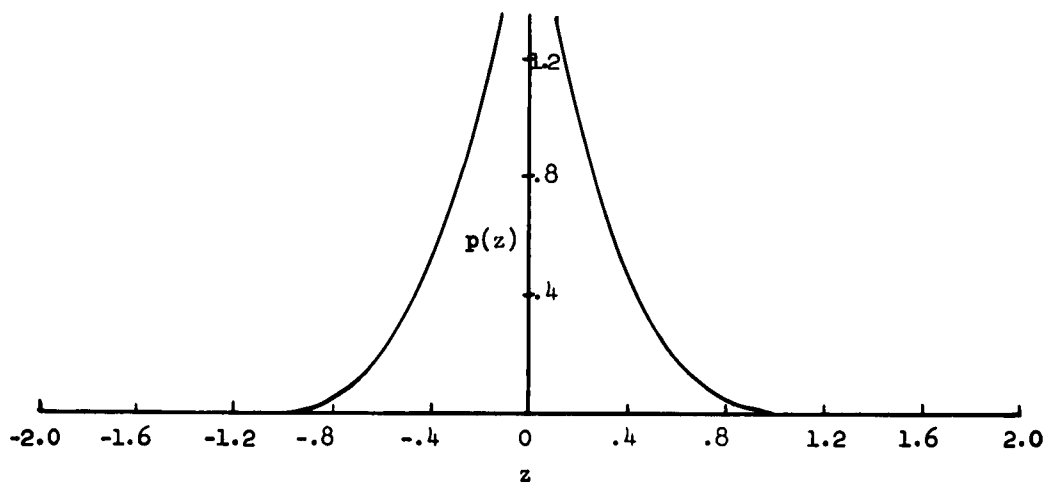


Fig. 17. P.D.F. of  $z = xy$ ,  $x$  and  $y$  independent,  
 $x$  = triangular variate,  $y$  = sinusoidal variate.

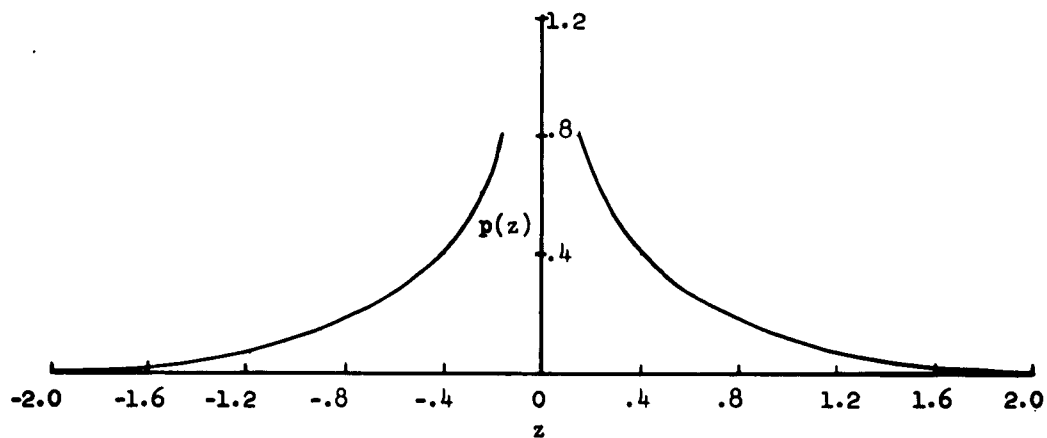


Fig. 18. P.D.F. of  $z = xy$ ,  $x$  and  $y$  independent  
 $x$  = gaussian variate,  $y$  = rectangular variate

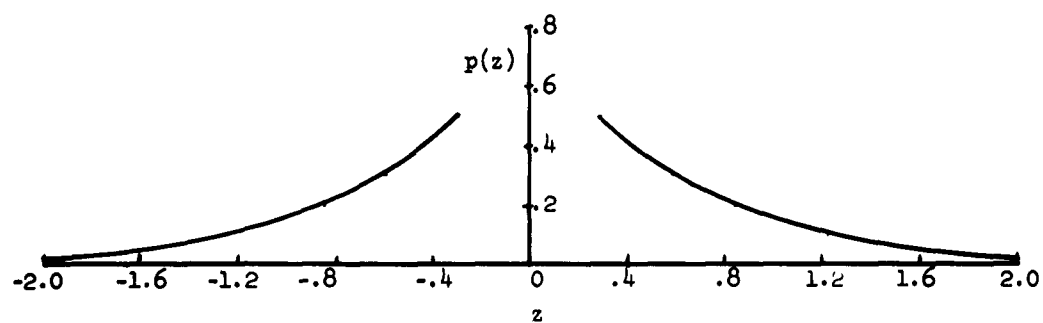


Fig. 19. P.D.F. of  $z = xy$ ,  $x$  and  $y$  independent,  
 $x$  = gaussian variate,  $y$  = sinusoidal variate.

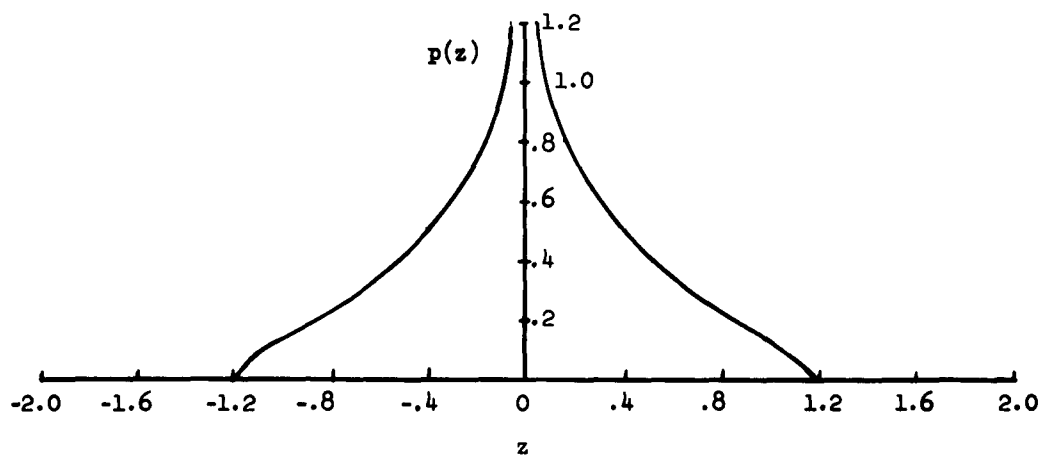


Fig. 20. P.D.F. of  $z = xy$ ,  $x$  and  $y$  independent,  
 $x$  = rectangular variate,  $y$  = sinusoidal variate.

The first four p.d.f.'s of  $z$  are plotted in the same sheet, Fig. 21. For a more rational comparison, the variances of the four original p.d.f.'s of  $x$  have all been normalized to unity. In so doing, the scale for the gaussian variable is kept the same while the ranges of the triangular, rectangular and sinusoidal variables are extended from  $(-1, 1)$  to  $(-\sqrt{6}, \sqrt{6})$ ,  $(-\sqrt{3}, \sqrt{3})$ , and  $(-\sqrt{2}, \sqrt{2})$  respectively.

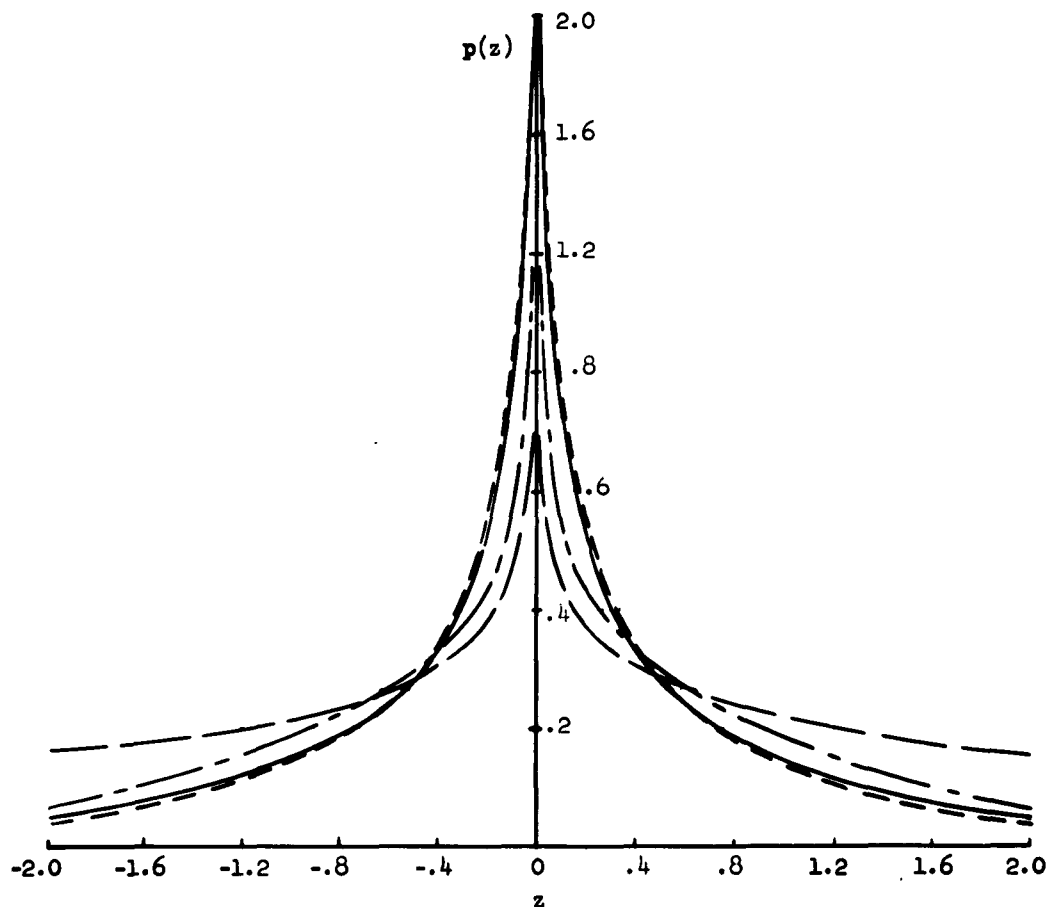


Fig. 21. P.D.F.'s of Products of

- (a) - - - - - Two independent gaussian variates
- (b) ————— Two independent triangular variates
- (c) - . - . - . Two independent rectangular variates
- (d) ———— Two independent sinusoidal variates

Normalized variance = 1

### III. SUM AND PRODUCT OF TWO DEPENDENT GAUSSIAN VARIABLES

Let  $x$  and  $y$  be two dependent gaussian variables whose joint p.d.f. is

$$W_2(x, y) = \frac{1}{2\pi} \frac{1}{\sqrt{|b|}} e^{-\frac{Q^{-1}(x, y)}{2}} \quad (\text{III-1})$$

where the covariance matrix is

$$[b] = \begin{bmatrix} 1 & \rho \\ \rho & 1 \end{bmatrix}, \quad (\text{III-2})$$

its determinant is

$$|b| = 1 - \rho^2, \quad (\text{III-3})$$

and the quadratic form is

$$Q^{-1}(x, y) = \frac{1}{|b|} [x^2 - 2\rho xy + y^2]. \quad (\text{III-4})$$

It is required in this section to find the p.d.f.'s of the sum  $s = x + y$  and of the product  $z = xy$ .

#### Sum

First, we determine  $p(s)$ . From equation (I-3a) and (III-1)

$$\begin{aligned} p(s) &= \int_{-\infty}^{\infty} W_2(x, s-x) dx \\ &= \frac{1}{2\pi \sqrt{1-\rho^2}} \int_{-\infty}^{\infty} e^{-\frac{1}{2(1-\rho^2)} [x^2 - 2\rho x(s-x) + (s-x)^2]} dx. \end{aligned}$$

Completing the square in the exponent and simplifying

$$\begin{aligned} p(s) &= \frac{1}{2\pi \sqrt{1-\rho^2}} e^{-\frac{z^2}{4(1+\rho)}} \int_{-\infty}^{\infty} e^{-\frac{1}{1-\rho} (x - \frac{z}{2})^2} dx \\ &= \frac{1}{\sqrt{2\pi} \sqrt{2(1+\rho)}} e^{-\frac{z^2}{2 \cdot 2(1+\rho)}} \left[ \frac{1}{\sqrt{2\pi} \sqrt{\frac{1-\rho}{2}}} \int_{-\infty}^{\infty} e^{-\frac{(x - \frac{z}{2})^2}{2 \left(\frac{1-\rho}{2}\right)}} dx \right]. \end{aligned}$$

The last factor in the bracket is equal to unity, therefore

$$p(s) = \frac{1}{\sqrt{2\pi} \sqrt{2(1+\rho)}} e^{-\frac{z^2}{2 \cdot 2(1+\rho)}} = \frac{1}{\sqrt{2\pi} \sigma} e^{-\frac{z^2}{2\sigma^2}}, \quad (\text{III-5})$$

where

$$\sigma^2 = 2(1+\rho)$$

is the variance of  $s$ .

Figure 22 shows  $p(s)$  for four values of the correlation coefficient  $\rho$  (here  $\rho$  is numerically equal to the covariance of  $x$  and  $y$ ). When  $\rho = -1$  the variables  $x$  and  $y$  are entirely dependent and in fact  $y = -x$  with probability one. Therefore,  $p(s)$  is a delta function at  $s = 0$ . When  $\rho = 0$ , the variables  $x$  and  $y$  are independent\*. This particular  $p(s)$  is the same as the case 2 of section I, where the variance of  $s$  is 2. When  $\rho = 1$ , the variables  $x$  and  $y$  are again entirely dependent but this time  $y = x$  with probability one. Therefore  $p(s)$ , while still gaussian in shape, has  $\sigma = 2$  and variance  $\sigma^2 = 4$ .

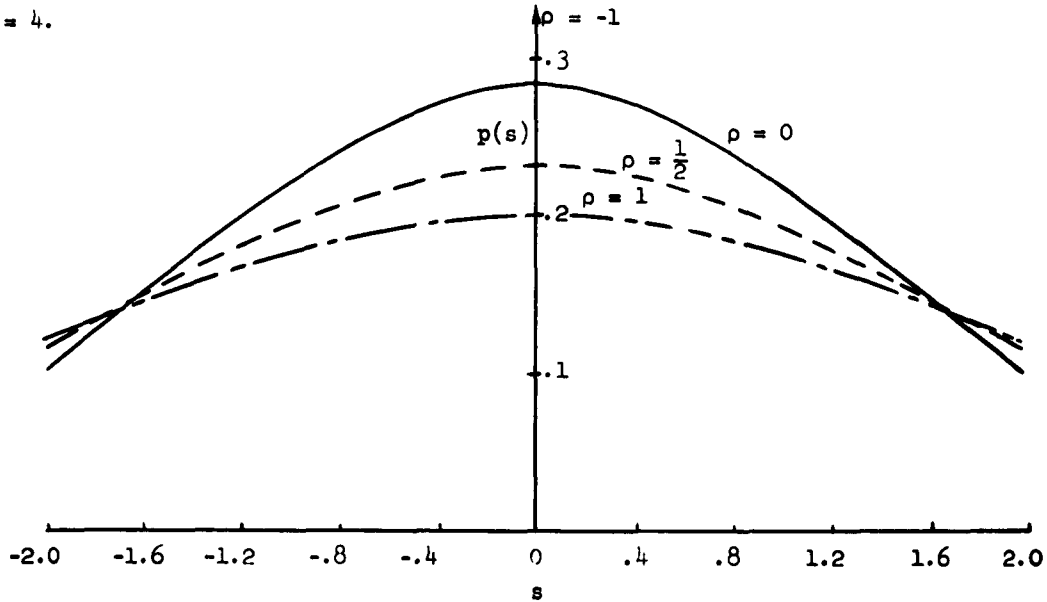


Fig. 22. P.D.F. of the Sum of 2 Dependent Gaussian Variates.

\*Note that it is a property of gaussian variables that zero correlation implies independence of variables and vice versa.

### Product

Next, we determine  $p(z)$ . From equations (II-3a) and (III-1), we have, for  $z > 0$

$$\begin{aligned}
 p(z) &= 2 \int_0^{\infty} W_2(x, \frac{z}{x}) \frac{1}{x} dx \\
 &= \frac{1}{\pi \sqrt{1-\rho^2}} \int_0^{\infty} e^{-\frac{1}{2(1-\rho^2)} (x^2 - 2\rho z + \frac{z^2}{x^2})} \frac{1}{x} dx \\
 &= \frac{1}{\pi \sqrt{1-\rho^2}} e^{\frac{\rho z}{1-\rho^2}} \int_0^{\infty} e^{-\frac{1}{2(1-\rho^2)} (x^2 + \frac{z^2}{x^2})} \frac{1}{x} dx \\
 &= \frac{1}{\pi \sqrt{1-\rho^2}} e^{\frac{\rho z}{1-\rho^2}} \int_0^{\infty} e^{-\frac{z}{2\sqrt{1-\rho^2}} \left[ \left( \frac{x}{\sqrt{z} \sqrt[4]{1-\rho^2}} \right)^2 + \left( \frac{\sqrt{z} \sqrt[4]{1-\rho^2}}{x^2} \right)^2 \right]} \frac{1}{x} dx .
 \end{aligned}$$

Let

$$\frac{x}{\sqrt{z} \sqrt[4]{1-\rho^2}} = e^{\theta} .$$

Then the p.d.f. becomes

$$\begin{aligned}
 p(z) &= \frac{1}{\pi \sqrt{1-\rho^2}} e^{\frac{\rho z}{1-\rho^2}} \int_{-\infty}^{\infty} e^{-\frac{z}{\sqrt{1-\rho^2}} \cosh 2\theta} d\theta \\
 &= \frac{1}{2\sqrt{1-\rho^2}} e^{\frac{\rho z}{1-\rho^2}} \left[ {}_1H_0^{(1)} \left( \frac{|z|}{1-\rho^2} \right) \right] . \quad (III-6)
 \end{aligned}$$

The last step is given on p. 479, Courant-Hilbert, "Methods of Mathematical Physics", volume I.  $H_0^{(1)}$  is the Hankel's function, zero order, first kind, with imaginary argument. It is tabulated on pp. 236-242, Jahnke and Emde, "Table of Functions", 4th edition. A similar integral was evaluated by this method in case 2 of section II.

For  $z < 0$  it can be shown that the formula for  $p(z)$  remains almost the same except for a change in the sign of the argument of the function  $H_0^{(1)}$ . Therefore,

$$p(z) = \frac{1}{2\sqrt{1-\rho^2}} e^{\frac{\rho z}{1-\rho^2}} \left[ {}_1H_0^{(1)} \left( \frac{|z|}{1-\rho^2} \right) \right] . \quad (III-7)$$

Figure 23 shows  $p(z)$  for three values of  $\rho$ . When  $\rho = 1$ ,  $z = x^2$ , and  $p(z)$  is reduced to the simpler expression derivable by a more direct method,

$$p(z) = p(x^2) = \begin{cases} 0 & z < 0 \\ \frac{1}{\sqrt{2\pi z}} e^{-\frac{z}{2}} & z > 0 \end{cases} \quad (\text{III-8})$$

When

$$\rho = -1, \quad z = -x^2,$$

and

$$p(z) = p(-x^2) = \begin{cases} \frac{1}{\sqrt{-2\pi z}} e^{+\frac{z}{2}} & z < 0 \\ 0 & z > 0 \end{cases} \quad (\text{III-9})$$

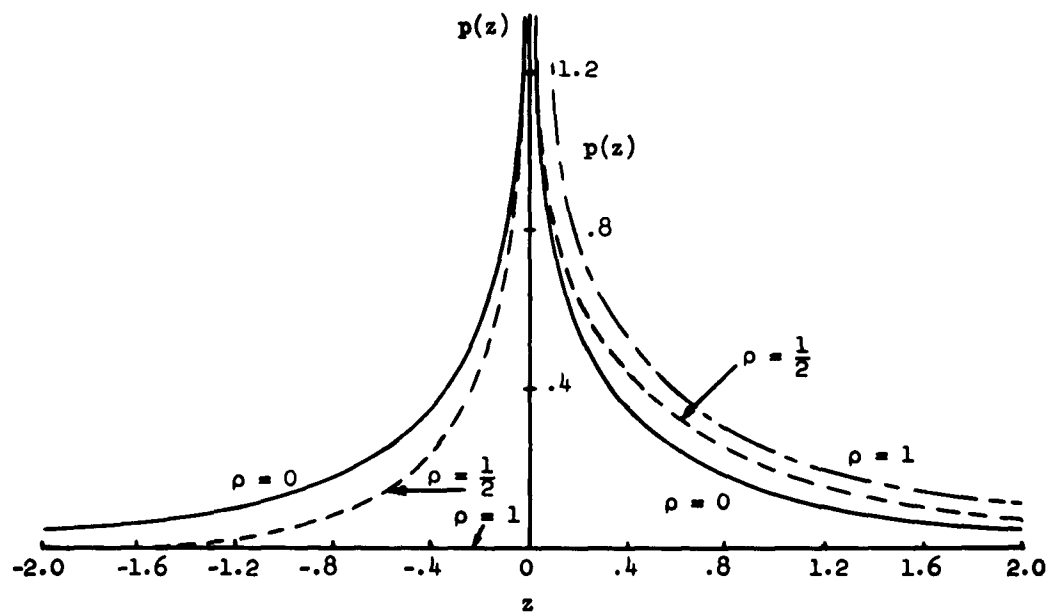


Fig. 23. P.D.F. of the Product of 2 Dependent Gaussian Variates.



When  $\rho = 0$ ,  $x$  and  $y$  are independent. The  $p(z)$  corresponding to this particular case is the same as the case 2 of section II, namely

$$p(z) = \frac{1}{2} \left[ 1 H_0^{(1)}(iz) \right] . \quad (\text{III-10})$$

#### IV. SUM AND PRODUCT OF TWO DEPENDENT INVERSE-SINUSOIDAL VARIABLES

For the variables other than gaussian, there is no longer a one-to-one relation between statistical dependence and correlation. While it is true that independent variables are not correlated, zero (linear) correlation does not always insure independence. In other words, the covariance matrix of two non-gaussian variables does not specify uniquely the joint p.d.f.

In order to demonstrate the calculation of p.d.f.'s of the sum and product of two dependent sinusoidal variables, it is desirable to select a suitable dependence condition so that the joint p.d.f. will resemble to a certain degree that of the gaussian variables. It is well known that the constant-level contours of the joint p.d.f. of two gaussian variables are ellipses. In the following example, the boundary of the joint p.d.f. of two inverse-sinusoidal variables is also an ellipse.

Let  $\theta$  and  $\alpha$  be two independent random variables whose p.d.f.'s  $p_1(\theta)$  and  $p_2(\alpha)$  are both assumed to be rectangular and centered about zero. However, the range of  $\theta$  is assumed to be  $(-\pi, \pi)$  while that of  $\alpha$  is  $(-\Delta, \Delta)$  where  $|\Delta| \leq \pi$ . Although  $\theta$  and  $\alpha$  are independent, the derived variables  $x = \sin \theta$  and  $y = \sin (\theta + \alpha)$  will be statistically dependent. We shall evaluate the p.d.f.'s of the sum  $s = x + y$  and the product  $z = xy$ . But first, it is required to derive the expression for the joint p.d.f.  $W_2(x, y)$ .

It is given that

$$p_1(\theta) = \frac{1}{\pi} \text{rect} \left( \frac{\theta}{\pi} \right) \quad * \quad (\text{IV-1})$$

$$p_2(\alpha) = \frac{1}{2\Delta} \text{rect} \left( \frac{\alpha}{2\Delta} \right) \quad . \quad (\text{IV-2})$$

The joint p.d.f. of  $\theta$  and  $\alpha$  is

$$w_2(\theta, \alpha) = p_1(\theta) p_2(\alpha) = \frac{1}{2\Delta\pi} \text{rect} \left( \frac{\theta}{\pi} \right) \text{rect} \left( \frac{\alpha}{2\Delta} \right) \quad . \quad (\text{IV-3})$$

By the standard technique of change of variables, the joint p.d.f. of  $(x, y)$  is given by

$$w_2(x, y) = w_2(\theta, \alpha) \frac{1}{J} \quad (\text{IV-4})$$

where  $J$  is the jacobian of the transformation, given as follows

$$\begin{aligned} J \left( \frac{x, y}{\theta, \alpha} \right) &= \begin{vmatrix} \frac{\partial x}{\partial \theta} & \frac{\partial y}{\partial \theta} \\ \frac{\partial x}{\partial \alpha} & \frac{\partial y}{\partial \alpha} \end{vmatrix} = \begin{vmatrix} \cos \theta & \cos(\theta + \alpha) \\ 0 & \cos(\theta + \alpha) \end{vmatrix} = \cos \theta \cos(\theta + \alpha) \\ &= \sqrt{1-x^2} \sqrt{1-y^2} \quad . \end{aligned} \quad (\text{IV-5})$$

---



$$* \text{The function } \text{rect} \left( \frac{\theta}{\pi} \right) = \begin{cases} 0 & \theta < -\frac{\pi}{2} \\ 1 & -\frac{\pi}{2} < \theta < \frac{\pi}{2} \\ 0 & \theta > \frac{\pi}{2} \end{cases} .$$

It can be shown that due to periodicity of the sine function, the results of assuming either  $p_1(\theta) = \frac{1}{\pi} \text{rect} \left( \frac{\theta}{\pi} \right)$  or  $p_1(\theta) = \frac{1}{2\pi} \text{rect} \left( \frac{\theta}{2\pi} \right)$  will be the same.


Substituting (IV-3) and (IV-5) into (IV-4), we get

$$W_2(x, y) = \frac{1}{2\Delta\pi} \operatorname{rect}\left(\frac{\sin^{-1}x}{\pi}\right) \operatorname{rect}\left(\frac{\sin^{-1}y - \sin^{-1}x}{2\alpha}\right) \frac{1}{\sqrt{1-x^2} \sqrt{1-y^2}} . \quad (\text{IV-6})$$

The general outlines of  $W_2(\theta, \theta + \alpha)$  and  $W_2(x, y)$  in their respective planes are shown in Fig. 24. The altitude of  $W_2(\theta, \theta + \alpha)$  is constant over the central area within the boundaries, but is doubled over the shaded portions at two corners due to the repetition property of  $\sin(\theta + \alpha)$  when  $\theta + \alpha > \frac{\pi}{2}$ . The function  $W_2(x, y)$  is not constant, but is contained within the ellipse. Over the shaded area at two corners the function is doubly folded for the above mentioned reason.

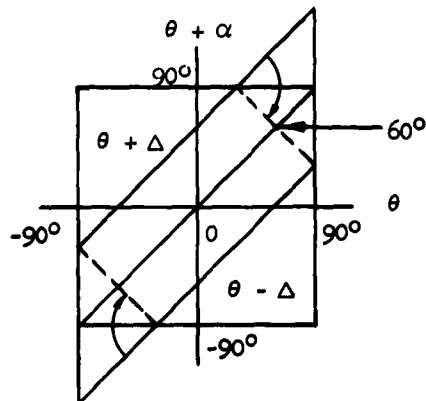

(a) Outlines of  $W_2(\theta, \theta + \alpha)$ ,  
 $\theta$  and  $\alpha$  are independent.

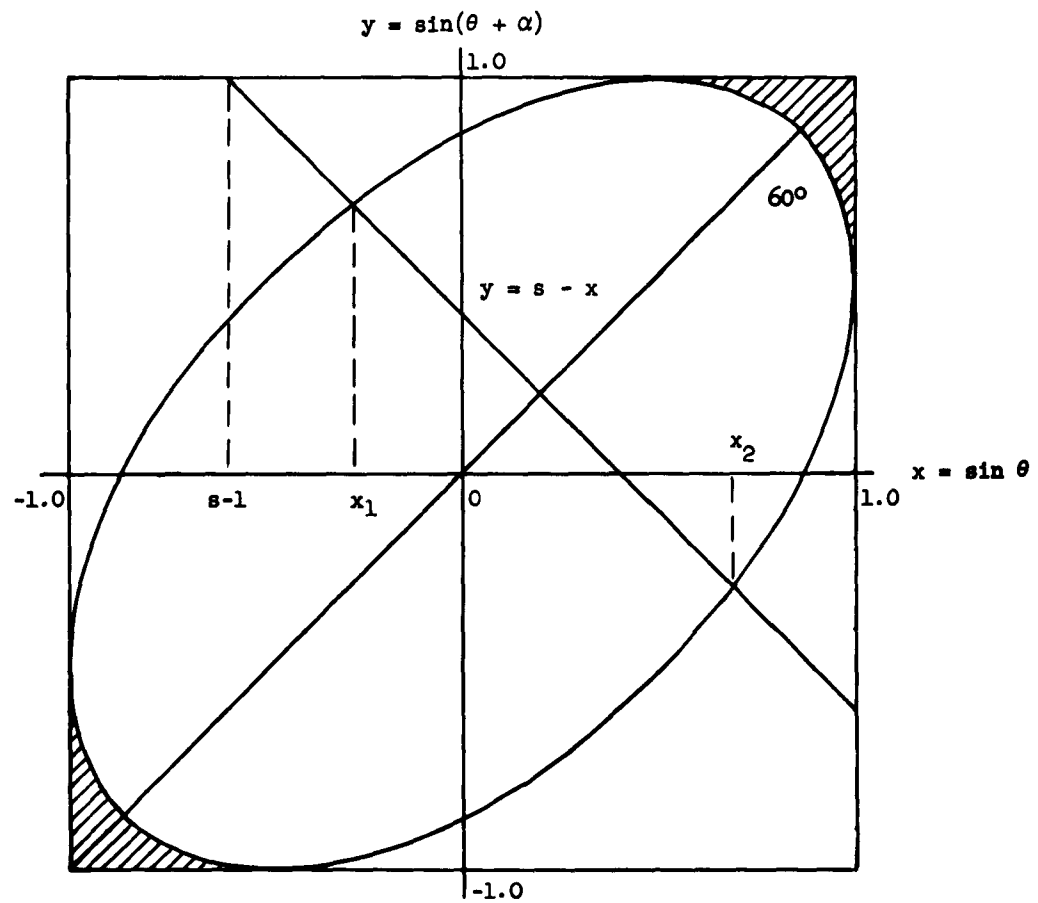

(b) Outlines of  $W_2(x, y)$ ,  $x = \sin \theta$ ,  $y = \sin(\theta + \alpha)$ .

Fig. 24.

### Sum

Now we may proceed to derive the p.d.f. of the sum  $p(s)$ . With the help of Fig. 24 it is evident that

$$\begin{aligned} p(s) &= \int_{s-1}^1 W_2(x, y = s-x) dx \\ &= \frac{1}{2\Delta\pi} \int_{s-1}^1 \text{rect}\left(\frac{\sin^{-1}x}{\pi}\right) \text{rect}\left(\frac{\sin^{-1}(s-x) - \sin^{-1}x}{2\Delta}\right) \frac{1}{\sqrt{1-x^2} \sqrt{1-(s-x)^2}} dx . \end{aligned} \quad (\text{IV-7})$$

Within the upper and lower integration limit of  $x$ , the function

$$\text{rect}\left(\frac{\sin^{-1}x}{\pi}\right) = 1 . \quad (\text{IV-8})$$

However, in the same range

$$\text{rect}\left(\frac{\sin^{-1}(s-x) - \sin^{-1}x}{2\Delta}\right) = \begin{cases} 0 & s-1 < x < x_1 \\ 1 & x_1 < x < x_2 \\ 0 & x_2 < x \end{cases} , \quad (\text{IV-9})$$

where  $x_1$  and  $x_2$  are the roots of the equation

$$\sin^{-1}(s-x) - \sin^{-1}x = \Delta . \quad (\text{IV-10})$$

Therefore, equation (IV-7) may be rewritten as

$$p(s) = \frac{1}{2\Delta\pi} \int_{x_1}^{x_2} \frac{1}{(1-x^2) [1-(s-x)^2]} dx . \quad (\text{IV-11})$$

This equation is applicable for the range of  $s$

$$0 < s < 1 + a \quad \text{where} \quad a = \cos \Delta . \quad (\text{IV-12})$$

For the range

$$1 + a < s < \sqrt{2(1+a)}$$

the line corresponding to

$$x + y = s$$

cuts partly through the ellipse and partly through the shaded region of the two corners. Since the integrands are doubled in two of the three segments of the line, the integral of (IV-7) is better expressed in three parts:

$$p(s) = \frac{1}{2\Delta x} \left[ 2 \int_{s-1}^{x_1} + \int_{x_1}^{x_2} + 2 \int_{x_2}^1 \right] . \quad (\text{IV-13})$$

The two roots  $x_1$  and  $x_2$  of equation (IV-10) are identical when

$$s = \sqrt{2(1+a)} = s_{\max} \quad (\text{IV-14})$$

which corresponds to the case when the line  $x + y = s$  is just tangent to the ellipse of Fig. 24. Therefore, in the range

$$\sqrt{2(1+a)} < s < 2 \quad (\text{IV-15})$$

the required p.d.f. is

$$p(s) = \frac{1}{2\Delta x} \cdot 2 \int_{s-1}^1 \frac{1}{\sqrt{(1-x^2) [1-(s-x)^2]}} dx . \quad (\text{IV-16})$$

The Integrals in (IV-11), (IV-13) and (IV-16) are all reducible to the elliptic integrals of the first kind. See, for example, p. 71 of Peirce, "A Short Table of Integrals." The resulting expressions are summarized on the next page:

$$(1) \quad 0 < s < 1 + a \quad (a = \cos \Delta)$$

$$p(s) = \frac{1}{2\Delta\pi} [F(\alpha, \phi_1) - F(\alpha, \phi_2)]$$

where  $F$  is the elliptic integral of the first kind,

$$\alpha = \sin^{-1}k, \quad k = \sqrt{(1 + \frac{s}{2})(1 - \frac{s}{2})}$$

$$\phi_1 = \sin^{-1}b, \quad \phi_2 = \sin^{-1}b_2 \quad (IV-17)$$

$$b_1 = \sqrt{\left(\frac{2}{2-s}\right)\left(\frac{1-x_1}{s+1-x_1}\right)}, \quad b_2 = \sqrt{\left(\frac{2}{2-s}\right)\left(\frac{1-x_2}{s+1-x_2}\right)}$$

$$x_1 = \frac{s}{2} \left[ 1 + \sqrt{(1-a)\left(\frac{2}{s^2} - \frac{1}{1+a}\right)} \right]$$

$$x_2$$

$$(2) \quad 1 + a < s < \sqrt{2(1+a)}$$

$$p(s) = \frac{1}{2\Delta\pi} [F(\alpha, \phi_1) + 3F(\alpha, \phi_2)] \quad (IV-18)$$

where the symbols are the same as in (1)

$$(3) \quad 2(1+a) < s < 2$$

$$p(s) = \frac{1}{\Delta\pi} K(\alpha) \quad (IV-19)$$

where  $K$  is the complete elliptic integral of the first kind.

The graphs of  $p(s)$  are plotted in Fig. 25 for 3 values of  $a (= \cos \Delta)$ . The corresponding outlines of  $W_2(x, y)$  are shown in Fig. 26. The values of  $s_{\max}$  are given by equation (IV-14). It is seen that for  $a = 1$ , i.e.,  $\Delta = 0$ ,  $x$  and  $y$  are entirely dependent and  $y = x$  with probability one. Therefore,  $s = 2x$ , and  $p(s)$  is similar to  $p_1(x)$  except for a scale factor of 2. For  $a = -1$ , i.e.,  $\Delta = \pi$ ,  $x$  and  $y$  are statistically independent, and the resultant  $p(s)$  is identical to case 4 of section I.


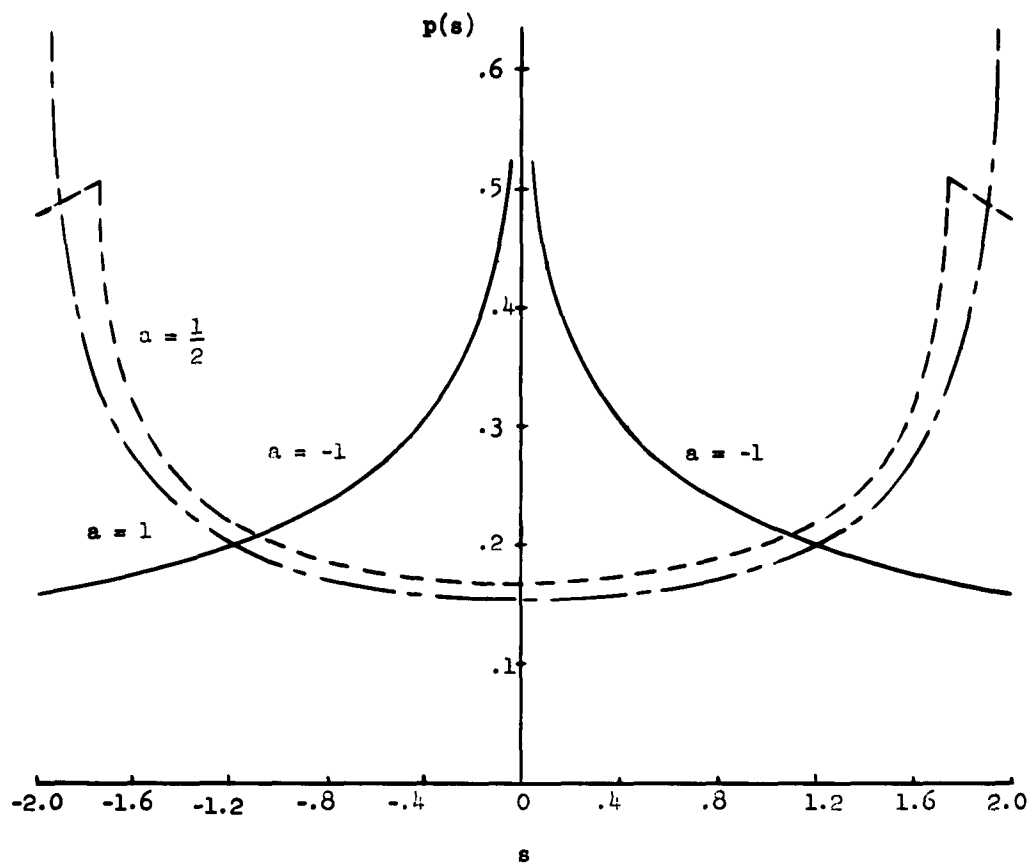


Fig. 25. P.D.F. of the Sum of Two Dependent Sinusoidal Variates.  
 $(a = \cos \Delta)$




Fig. 26. Outlines of  $W_2(x, y)$ 's for various values of  $a$ ,  $a = \cos \Delta$ .

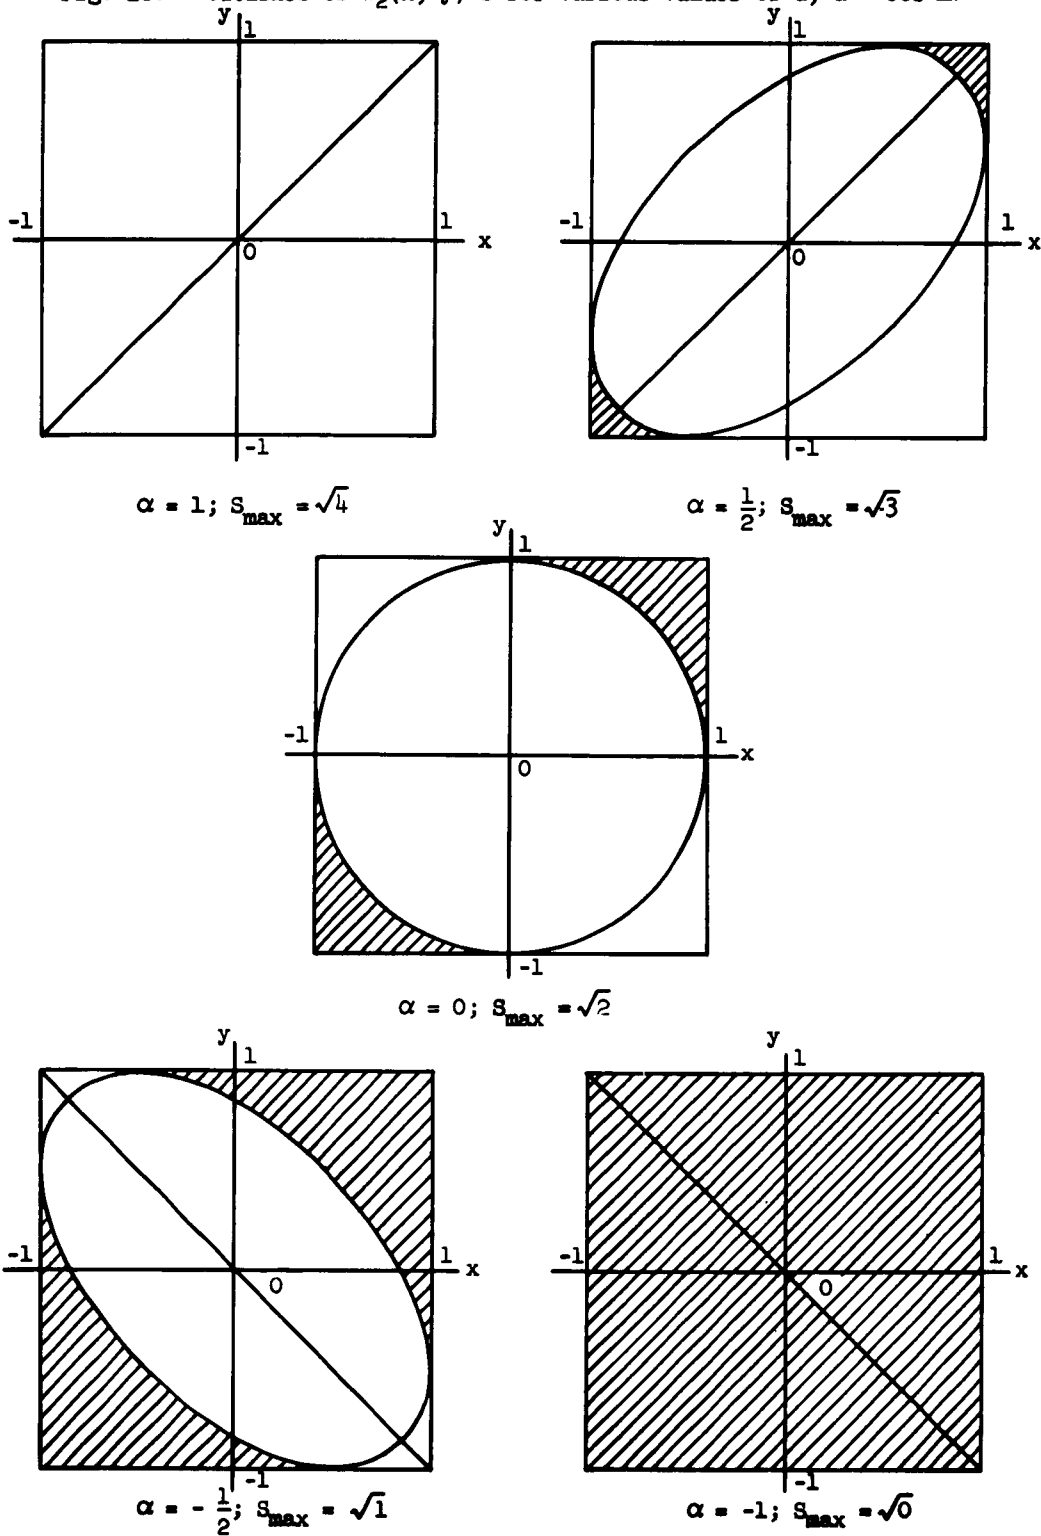

### Product

Now we proceed to derive in a similar manner the p.d.f. of the product  $p(z)$ , where  $z = xy$  and  $W_2(x, y)$  is given by equation (IV-6). Referring again to Fig. 24 the elliptical outline for  $W_2(x, y)$  remains the same. However, the lines which correspond to the constant product are the hyperbolic segments

$$xy = z \quad (IV-18)$$

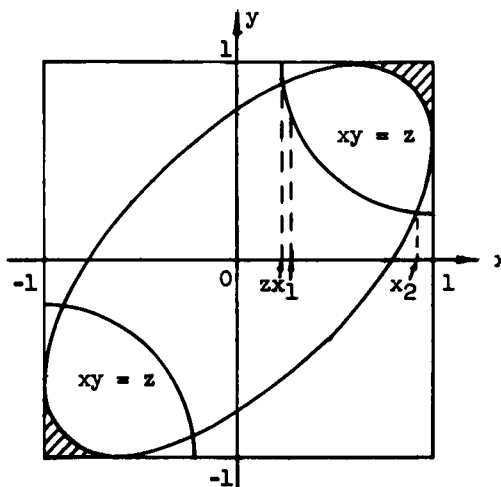

contained within the square of  $xy$  plane. It can be shown that the general expression of the p.d.f. of  $z$  is

$$p(z) = \frac{1}{\Delta\pi} \int_z^1 \text{rect}\left(\frac{\sin^{-1}x}{\pi}\right) \text{rect}\left[\frac{\sin^{-1}(\frac{z}{x}) - \sin^{-1}x}{2\Delta}\right] \frac{1}{\sqrt{1-x^2}\sqrt{x^2-z^2}} dx \quad (IV-19)$$

Here, as before, the value of the function

$$\text{rect}\left(\frac{\sin^{-1}x}{\pi}\right) = 1$$

within the range  $z < x < 1$ . However, the function

$$\text{rect}\left[\frac{\sin^{-1}(\frac{z}{x}) - \sin^{-1}x}{2\Delta}\right] = 1$$

within the range  $z < x_1 < x < x_2 < 1$  where  $x_1$  and  $x_2$  are the roots of the equation

$$\sin^{-1} \frac{z}{x} - \sin^{-1} x = \Delta \quad (\text{IV-20})$$

Therefore, equation (IV-19) is reduced to

$$p(z) = \frac{1}{\Delta\pi} \int_{x_1}^{x_2} \frac{1}{\sqrt{1-x^2} \sqrt{x^2 - z^2}} dx \quad (\text{IV-21})$$

This integral is again reducible to the elliptic integral of the first kind. The results are summarized below:

$$(1) \quad 0 < z < a \quad (= \cos \Delta)$$

$$p(z) = \frac{1}{\Delta\pi} [F(\alpha, \phi_1) - F(\alpha, \phi_2)]$$

where  $F$  is the elliptic integral of the first kind,

$$\begin{aligned} \alpha &= \sin^{-1} k, & k &= \sqrt{1-z^2} \\ \phi_1 &= \sin^{-1} b_1, & \phi_2 &= \sin^{-1} b_2 \\ b_1 &= \frac{\sqrt{1-x_1^2}}{\sqrt{1-z^2}}, & b_2 &= \frac{\sqrt{1-x_2^2}}{\sqrt{1-z^2}} \\ x_1^2 &= \frac{1 + 2az - a^2}{2} + \frac{1}{2} \sqrt{(1-a^2)[1 - a^2 + 4z(a-z)]} \\ x_2^2 & \end{aligned} \quad (\text{IV-22})$$

$$(2) \quad a < z < \frac{1+a}{2}$$

$$p(z) = \frac{1}{\Delta\pi} [2K(\alpha) - F(\alpha, \phi_1) + F(\alpha, \phi_2)] \quad (\text{IV-23})$$

where  $K$  is the complete elliptic integral of the first kind and other symbols are the same as in (1).

$$(3) \quad \frac{1+a}{2} < z < 1$$

$$p(z) = \frac{2}{\Delta\pi} K(\alpha) \quad (\text{IV-24})$$

$$(4) \quad -1 < z < \frac{a-1}{2}$$

$$p(z) = 0 \quad (\text{IV-25})$$

$$(5) \quad \frac{a-1}{2} < z < 0$$

$$p(z) = \frac{1}{\Delta\pi} [F(\alpha, \phi_1) - F(\alpha, \phi_2)] \quad (\text{IV-26})$$

The graphs of  $p(z)$  are plotted in Fig. 27 for 3 values of  $a (= \cos \Delta)$ . Again the cases  $a = 1$  and  $a = -1$  correspond to the complete dependence and independence of the variables  $x$  and  $y$ .

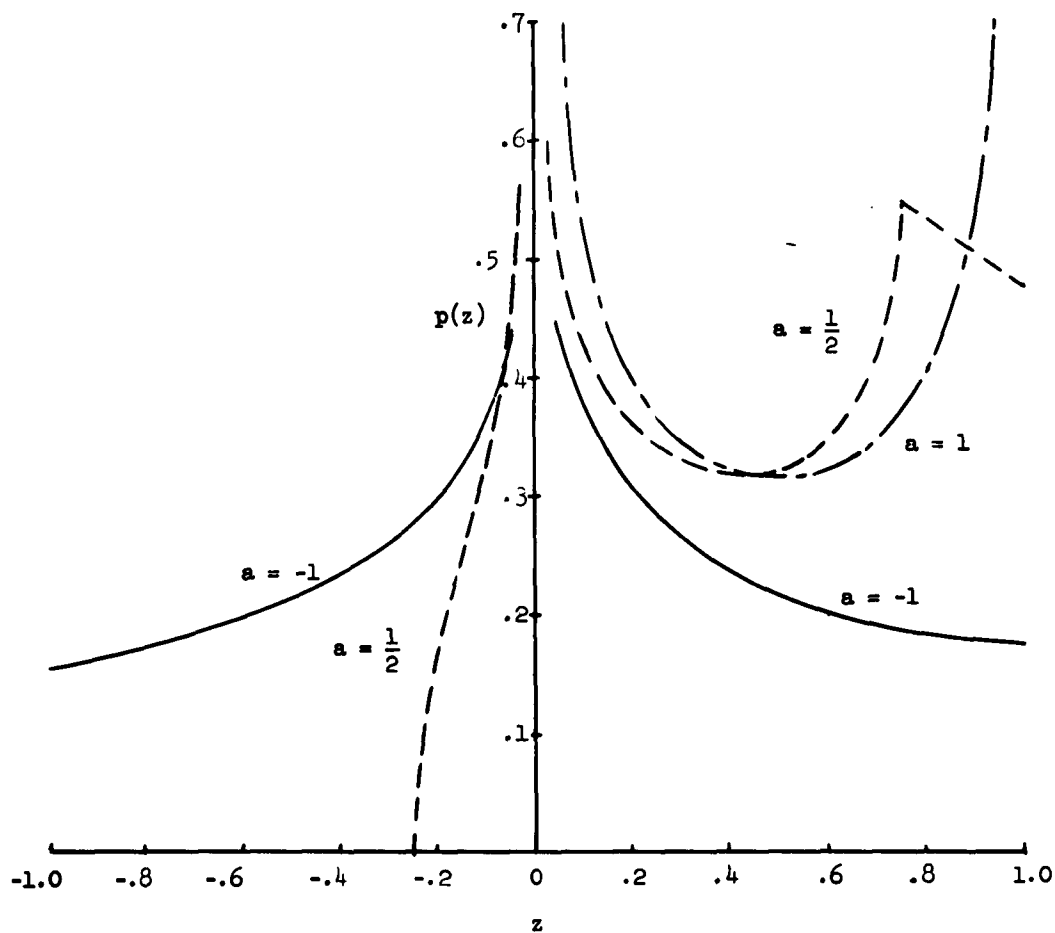


Fig. 27. P. D. F. of the Product of Two Dependent Sinusoidal Variates.

# DISTRIBUTION LIST

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
AF 5	AFMTC (AFMTC Tech Library - MU - 135 Patrick Air Force Base, Florida	1
AF 18	AUL Maxwell Air Force Base, Alabama	1
AF 43	ASD (ASAPRD- Dist) Wright-Patterson Air Force Base, Ohio	1
AF 124	RADC (RAYLD) Griffiss Air Force Base, New York ATTN: Documents Library	1
AF 139	AF Missile Development Center (MDGRT) Holloman Air Force Base, New Mexico	1
AF 318	ARL (ARA-2) Library AFL 2292, Building 450 Wright-Patterson Air Force Base, Ohio	1
Ar 5	Commanding General USASRDL Ft. Monmouth, New Jersey ATTN: Tech. Doc. Ctr. SIGRA/SL-ADT	1
Ar 9	Department of the Army Office of the Chief Signal Officer Washington 25, D. C. SIGRD-4a-2	1
Ar 50	Commanding Officer ATTN: ORDTL-012 Diamond Ordnance Fuze Laboratories Washington 25, D. C.	1
Ar 67	Redstone Scientific Information Center U. S. Army Missile Command Redstone Arsenal, Alabama	1
G 2	ASTIA (TIPAA) Arlington Hall Station Arlington 12, Virginia	10
G 68	National Aeronautics and Space Agency 1520 H Street, N.W. Washington 25, D. C. ATTN: Library	1
G 109	Director Langley Research Center National Aeronautics and Space Administration Langley Field, Virginia	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
M 6	AFCRL, OAR (CRIPA - Stop 39) L. G. Hanscom Field Bedford, Massachusetts	20
M 84	AFCRL, OAR (CRIP, J. R. Marple) L. G. Hanscom Field Bedford, Massachusetts	1
N 9	Chief, Bureau of Naval Weapons Department of the Navy Washington 25, D. C. ATTN: DLI-31	2
N 29	Director (Code 2027) U. S. Naval Research Laboratory Washington 25, D. C.	2
I 292	Director, USAF Project RAND The Rand Corporation 1700 Main Street Santa Monica, California THRU: AF Liaison Office	1
AF 253	Technical Information Office European Office, Aerospace Research Shell Building, 47 Cantersteen Brussels, Belgium	1
Ar 107	U. S. Army Aviation Human Research Unit U. S. Continental Army Command P. O. Box 428, Fort Rucker, Alabama ATTN: Maj. Arne H. Eliasson	1
G 8	Library Boulder Laboratories National Bureau of Standards Boulder, Colorado	2
M 63	Institute of the Aerospace Sciences, Inc. 2 East 64th Street New York 21, New York ATTN: Librarian	1
N 73	Office of Naval Research Branch Office, London Navy 100, Box 39 F. P. O. New York, New York	10
U 32	Massachusetts Institute of Technology Research Laboratory of Electronics Building 26, Room 327 Cambridge 39, Massachusetts ATTN: John H. Hewitt	1
U 431	Alderman Library University of Virginia Charlottesville, Virginia	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
G 9	Defense Research Member Canadian Joint Staff 2450 Massachusetts Avenue, N.W. Washington 8, D. C.	1
AF 2	ADC (ADLAN-G) Ent Air Force Base, Colorado	1
AF 19	AWS (AWSSS/TIPD) Scott Air Force Base, Illinois	1
AF 34	SAC Offutt Air Force Base, Nebraska	1
AF 35	TAC Langley Air Force Base, Virginia	1
AF 37	USAF Security Service (ESD) ATTN: Directorate of Systems Engineering DSC/Communications-Electronics San Antonio, Texas	1
AF 55	WADD (WCLNX) Wright-Patterson Air Force Base, Ohio	1
AF 76	Air Proving Ground Command SAGE Project Office (Building 6) c/o RAND Corporation P. O. Box 98 Lexington 73, Massachusetts	1
AF 153	AF Ballistic Missile Division (WDSOT) Air Force Unit Post Office Los Angeles 45, California	1
AF 179	AFOSR (Dr. Harold Wooster) Director Research Information Office Washington 25, D. C.	1
AF 225	RADC (RCUAT) Griffiss Air Force Base, New York	1
AF 332	WADD (WWRNCS) Wright-Patterson Air Force Base, Ohio	1
Ar 4	Director Evans Signal Laboratory Belmar, New Jersey ATTN: Mr. S. Grossmann	1
Ar 20	Chief, U. S. Army Security Agency Arlington Hall Station Arlington 12, Virginia ATTN: ACOFS, G4, TL Section	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
Ar 66	Commanding General U. S. Army Electronic Proving Ground Fort Huachuca, Arizona ATTN: Technical Library, SIGPG-DM	1
Ar 111	USASDRL (SIGRA/SLNAC, Mr. J. Bartow) Ft. Monmouth, New Jersey	1
Ar 121	USASDRL (SIGRA/SL-NAC, Mr. G. Baiano) Ft. Monmouth, New Jersey	1
G 41	Federal Aviation Agency Bureau of Research and Development Washington 25, D. C.	1
G 75	Director National Security Agency Fort George G. Meade, Maryland ATTN: C3/TDL	1
G 109	Director Langley Research Center National Aeronautics and Space Administration Langley Field, Virginia	1
I 33	ADCOM 238 Main Street Cambridge, Massachusetts ATTN: Phillip Bello	1
I 38	Signatron, Inc. Miller Building 594 Marret Road Lexington 73, Massachusetts ATTN: Dr. Julian Bussgang	1
I 51	HRB Singer, Inc. 1517 Science Avenue State College, Pa.	1
I 76	Autonetics 9150 E. Imperial Highway Downey, California ATTN: Technical Library, '393-52	1
I 96	Sandia Corporation Sandia Base, P. O. Box 5800 Albuquerque, New Mexico ATTN: Classified Document Division	1
I 126	Convair, A Division of General Dynamics Corp. Fort Worth, Texas ATTN: K. G. Brown, Division Research Librarian	1
I 130	Parke Mathematical Labs, Inc. Bedford Road, Carlisle, Massachusetts ATTN: Dr. Nathan Grier Parke, III	1



<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 190	Motorola, Inc. Phoenix Research Laboratory 3102 No. 56th Street Phoenix, Arizona ATTN: Technical Librarian	1
I 194	Rand Corporation 1700 Main Street Santa Monica, California ATTN: Dr. A. L. Hiebert	1
I 228	Philco Corporation Research Division, Plant No. 50 4700 Wissahickon Avenue Philadelphia 44, Pa. ATTN: S. Zebrowitz	1
I 238	General Electric Company Knolls Research Laboratory 1 River Road Schenectady, New York ATTN: Dr. R. L. Shuey	1
I 266	ITT Federal Laboratories Technical Library 500 Washington Avenue Nutley 10, New Jersey	1
I 291	Radio Corporation of America Defense Electronic Products Building 10, Floor 7 Camden 2, New Jersey ATTN: Mr. Harold J. Schrader, Staff Engineer Organization of Chief Technical Administrator	1
I 312	STL Technical Library Document Acquisitions Space Technology Laboratories, Inc. P. O. Box 95001 Los Angeles 45, California	1
I 376	Hughes Aircraft Company Culver City, California ATTN: Dr. S. G. Lutz Communication and Miniaturization Department	1
I 445	The Rand Corp. 1700 Main Street Santa Monica, California ATTN: Dr. R. E. Kalaba	1
I 561	Melpar, Inc. 11 Galen Street Watertown, Massachusetts ATTN: Librarian	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
I 674	Stanford Research Institute Menlo Park, California ATTN: W. R. Vincent	1
I 675	Hazeltine Research Corp. 59-25 Little Neck Parkway Little Neck 62, New York ATTN: Donald Richman	1
I 784	Sylvania Electronic Systems Applied Research Laboratory 100 First Avenue Waltham, Massachusetts ATTN: Dr. Seymour Stein	1
I 921	Litton Systems, Inc. 221 Crescent Street Waltham, Massachusetts ATTN: Dr. David Van Meter	1
I 922	The Mitre Corp. Middlesex Turnpike Bedford, Massachusetts	1
I 957	Alton T. Butson 2030 109th Street, N.E. Bellevue, Washington	1
M 54	Hq. ESD (ESRDW, Major John J. Hobson) L. G. Hanscom Field Bedford, Massachusetts	1
M 55	ESD (ESRDW, Directorate of Technology) Applied Research Division L. G. Hanscom Field Bedford, Massachusetts	1
N 37	Office of Naval Research Department of the Navy Washington 25, D. C. ATTN: Code 427, Electronics Branch	1
N 57	Chief, Bureau of Ships Department of the Navy Washington 25, D. C. ATTN: Mr. D. Head, Code 823	1
N 59	U. S. Naval Air Development Center Johnsville, Pennsylvania ATTN: Librarian	1
N 85	Commanding Officer & Director U. S. Navy Electronics Laboratory (Library) San Diego 52, California	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
U 26	Massachusetts Institute of Technology Lincoln Laboratory P. O. Box 73 Lexington 73, Massachusetts ATTN: Mary A. Granese, Librarian	1
U 37	University of Michigan Engineering Research Institute Willow Run Laboratories Willow Run Airport Ypsilanti, Michigan ATTN: Librarian	1
U 41	Northeastern University Electronics Research Laboratory Boston, Massachusetts ATTN: M. W. Essigmann	1
U 60	New York University College of Engineering University Heights New York 53, New York ATTN: Dr. Robert F. Cotellessa	1
U 144	Jet Propulsion Laboratory California Institute of Technology 4800 Oak Grove Drive Pasadena 3, California ATTN: Dr. Eberhardt Rechtin	1
U 157	California Institute of Technology Jet Propulsion Laboratory 4800 Oak Grove Drive Pasadena 3, California ATTN: Mr. I. E. Newlan, Manager Technical Reports Section	1
U 286	University of Michigan Research Institute North Campus, Ann Arbor, Michigan ATTN: Gordon Roberts	1
U 397	Polytechnic Institute of Brooklyn Microwave Research Institute 55 Johnson Street Brooklyn, New York ATTN: Prof. E. J. Smith	1
U 396	Syracuse University Syracuse 10, New York ATTN: Prof. F. Reza	1
U 406	Massachusetts Institute of Technology Department of Electrical Engineering Cambridge, Massachusetts ATTN: Mr. Jack Cowan	1

<u>Code</u>	<u>Organization</u>	<u>No. of Copies</u>
U 408	Johns Hopkins University School of Engineering 34th and Charles Baltimore 18, Maryland ATTN: W. H. Huggins	1
U 411	Montana State College Electronics Research Laboratory Bozeman, Montana ATTN: Dr. W. Kilmer	1
U 395	Advanced Electronics Center at Cornell University General Electric Company Ithaca, New York ATTN: Dr. Robert Turner	1
	Hq. AFCRL, Office of Aerospace Research (CRRC) L. G. Hanscom Field Bedford, Massachusetts	1
	Hq. AFCRL, Office of Aerospace Research (CRRS) L. G. Hanscom Field Bedford, Massachusetts	6